HK-1650-4

SIZE: 15'-0"L X 3'-0"H X 4"D

POWER: 120 VAC, 60 Hz., 1-PHASE 153 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70 SERIES CONTROLLER.

CONTROL CABLE: 22GA 2-WIRE SHIELDED.

(IF WIRELESS ORDERED, CABLE NOT REQ'D.)

LEDs: LED BAR.

OPTIONS: MODEL HH-70 CLOCK HAND SWITCH FOR SECOND OPERATOR. (CLOCK START/STOP & MANUAL HORN.)


> MODEL HC-70 CLOCK HAND SWITCH FOR SECOND OPERATOR. (CLOCK START/STOP & CLOCK RESET.)

WIRELESS MP-70 CONTROL OPERATION.

ESTIMATED WEIGHT: 180 LBS.

## **GENERAL NOTES:**

- \* REFERENCE 01-0500-01 FOR INSTALLATION NOTES.
- \* POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

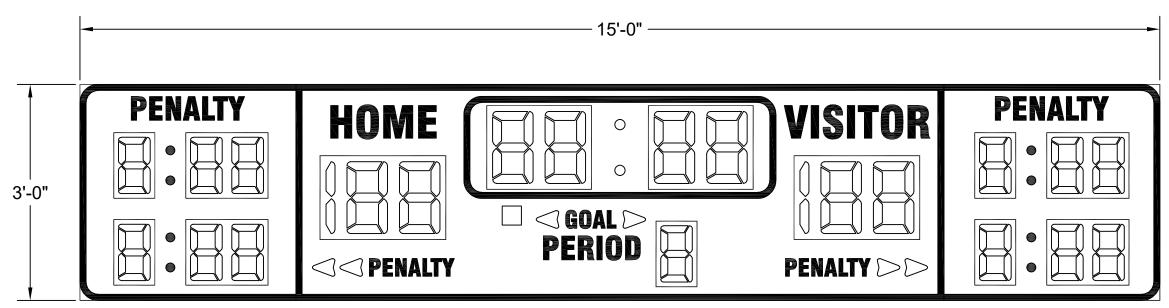

HK-1650-4

CUSTOMER APPROVAL: I HAVE F	ature below signifies my approval to proceed with the design w Ecceived and read the installation specifications contained in fair By Sales associate if you should have any questions or require	R-PLAY DOCUMENT NO. 01-0500-01. CONSULT YOUR
PROJECT:	SIGNATURE:	DATE:
REFERENCE #:	PRINT NAME:	
FAIR-PLAY	THIS DOCUMENT CONTAINS FAIR-PLAY PROPRIETARY INFORMATION. ANY OR OF ANY INFORMATION CONTAINED THEREIN FOR OTHER THAN THE SE EXPRESSLY PROHIBITED, EXCEPT AS MAY BE OTHERWISE AGREED TO IN	PECIFIC PURPOSE FOR WHICH IT WAS DISCLOSED IS

6110 AVIATOR DRIVE HAZELWOOD, MO 63042

FACE VIEW FOR HK-1650-4

MODEL BEW HK-1650-4 DATE 09-24-07 DWG. NO. SCALE 01 - 1 650 - 01 - 1

С	UPDATED TITLE BLOCK FORMAT	09-27-21	BEW
В	GENERAL UPDATES, ADDED POWER NOTE	06-07-12	BEW
Α	GENERAL UPDATES	04-26-11	BEW
OR	ORIGINAL RELEASE	09-24-07	BEW
REV.#	CHANGE	DATE	BY