


Fair-Play

A TRANS·LUX· COMPANY

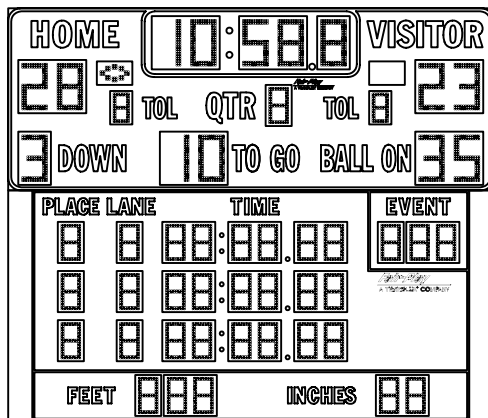

1'-0"L X 9'-6"H
FULL DEPTH SIGN,
TYPICAL

FB-8120(TK)-2 & TK-8918-2

FB-8120(TK)-2

SIZE: 20'-0"L X 7'-6"H X 10.25"D

POWER: 120 VAC, 60 Hz., 1-PHASE
480 WATTS. (FB-8120-2)
513 WATTS. (FB-8120TK-2)

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70.
CONTROL CABLE: (1) TWO CONDUCTOR SHIELDED.
(NO CABLE REQ'D. IF ORDERED WIRELESS.)

LED'S: AMBER LED.

OPTIONS: MODEL HC-70 CLOCK HAND SWITCH FOR SECOND OPERATOR.
(CLOCK START/STOP & CLOCK RESET.)

MODEL F600-70 SIDELINE CLOCK HAND SWITCH CONTROL
WITH SPLIT TIME.

MODEL F650-70 SIDELINE CLOCK HAND SWITCH CONTROL.

LIGHTNING DAMAGE REDUCTION UNIT.

OPTIONAL WIRELESS MP-70 OPERATION.

ESTIMATED WEIGHT: 500 LBS. (FB-8120-2)
640 LBS. (FB-8120TK-2)

WATER INGRESS

NO ADDITIONAL PENETRATIONS MAY BE CREATED IN THE PRODUCT UNLESS THEY ARE SEALED PER NEMA 4 STANDARD. ALL FIELD PENETRATIONS MUST BE TESTED USING A STREAM OF WATER POURED FROM A CONTAINER LOCATED NOT LESS THAN 6" AWAY HORIZONTALLY. WARRANTY WILL BE VOID IF THIS TESTING IS NOT COMPLETED DURING INSTALLATION, OR IF THERE IS WATER INGRESS FROM FIELD MODIFICATIONS. ANY CABINETS LOCATED ABOVE THE PRODUCT MUST NOT ALLOW WATER TO BUILD UP AND THEN FLOW THROUGH CONDUITS INTO THE PRODUCT. PENETRATIONS BETWEEN PRODUCT AND HIGHER CABINETS MUST BE SEALED BETWEEN THE CABINET INTERNAL SPACES USING WATER TIGHT CABLE TO CONDUIT SEALS. HOLES REMAINING FROM EYE BOLT REMOVAL MUST BE FILLED, SEALED AND TESTED.

VENTILATION

INSTALL PRODUCT SO THAT AIR FLOW IS NOT RESTRICTED. CUSTOMER'S STRUCTURE MUST ALLOW FOR THE FREE FLOW OF OUTSIDE AMBIENT AIR TO THE PRODUCT, WITHOUT RECIRCULATION OF AIR. WARRANTY WILL BE VOID IF COMPONENTS FAIL DUE TO AIR FLOW RESTRICTIONS.

WEB ADDRESS
FAIR-PLAY SCOREBOARDS
FACTORY ADDRESS
PHONE

fair-play.com
PO BOX 1847
1700 DELAWARE AVE.
515-265-5305

DES MOINES, IOWA 50305-1847
DES MOINES, IOWA 50317

102306 BEW

01-8120-86-1

TK-8918-2

SIZE: 18'-0"L X 9'-6"H X 10.25"D

POWER: 120 VAC, 60 Hz., 1-PHASE
778 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70.
CONTROL CABLE: (1) TWO CONDUCTOR SHIELDED.
(NO CABLE REQ'D. IF ORDERED WIRELESS.)

LED'S: AMBER LED.

OPTIONS: OPTIONAL WIRELESS MP-70 OPERATION.

ESTIMATED WEIGHT: 1,497 LBS.

(2) 1'-0"L X 9'-6"H FULL DEPTH SIGNS

SIZE: 1'-0"L X 9'-6"H X 10"D

PAINTED COPY AREA.

ESTIMATED WEIGHT: 48 LBS.