

# FAIR-PLAY<sup>®</sup> SCOREBOARDS


## CaptiVue<sup>®</sup> Sports Displays

### Product Data Sheet

#### 16MM — INDOOR LED MONOCHROME DISPLAYS

AVAILABLE IN AMBER LED

Fair-Play's 16mm monochrome LED CaptiVue displays convey not only text messages, but super-high quality pictures, images, graphics and animations in astounding detail. Great for showing information close up, or at larger distances by increasing the overall resolution size, Fair-Play's 16mm CaptiVue displays are available in standard and custom sizes, in single- or multi-faced display configurations.

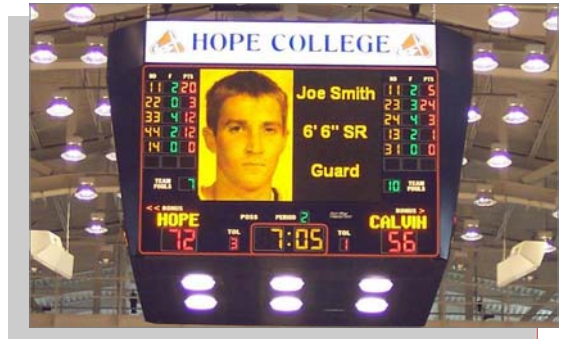

Hope College | Holland, Michigan  
4-sided, custom Basketball scoreboard with  
128 x 176 0.625 (16mm) amber displays

16 mm (0.625") Amber Indoor	16 mm (0.625") Full-Color Indoor	16 mm (0.625") Full-Color Outdoor	20 mm (0.787") Full-Color Outdoor	23 mm (0.9") Amber Indoor	23 mm (0.9") Full-Color Indoor	23 mm (0.9") Amber Outdoor	23 mm (0.9") Full-Color Outdoor	35 mm (1.375") Amber Outdoor	35 mm (1.375") Full-Color Outdoor	45 mm (1.75") Amber Outdoor	64 mm (2.5") Amber Outdoor
--------------------------------------	---	--	--	------------------------------------	---	-------------------------------------	--	---------------------------------------	--	--------------------------------------	-------------------------------------

### Superior Construction and Engineering:

CaptiVue displays are designed to be integrated into scoreboards and sports timing systems or used as a stand-alone message displays. Power with ProLine to schedule pre-, post-or in-game events and advertising and game time display production control.

- Long life 100,000 hour rated LEDs are up to 90% more efficient than incandescent lamps.
- Aluminum construction provides light-weight, non-corrosive strength while maintaining exacting standards.
- Fair-Play provides detailed installation and operation documentation with every product it sells.
- 100% solid state with quick-service design features.
- ETL and ETL-C certified to UL standard.
- 5-Year Warranty

**“The athletic program wanted to run regular messages and sponsorship logos. They’re really starting to generate more revenue from this type of advertising.”**

- Kurt Steiert, Iowa Direct, Cedar Falls, Iowa

### Display Features

Pixel pitch	16mm, (0.625")
Character height	4-inch
Color	Amber 1-LED per pixel
Brightness	1,000+ NITS
Anticipated LED life	Up to 100,000 hours
Viewing angle	140° horizontal x 60° vertical
Graphics and animation	FREE message-animations and backgrounds with ProLine control systems. ProLine includes easy-to-use import feature for JPEG, BMP, GIF, AVI and other common Windows®-type images to display in up to 256 shades.
Control system	ProLine for sports applications includes our exclusive Interactive Commander allowing the operator to drag-and-drop animations and messages to display instantly.
Communication options	<ul style="list-style-type: none"> <li>• Direct-wired</li> <li>• Wireless remote (RF)</li> <li>• LAN remote (TCP-IP)</li> </ul>
Standard power requirements	120V, single-phase, 60HZ 208V, three-phase, 60HZ

*Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.*