

BA-7216PC-2

SIZE: 16'-0"L X 9'-6"H X 10"D

POWER: 120 VAC, 60 Hz., 1-PHASE
427 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70 SERIES CONTROLLER.
CONTROL CABLE: 22GA 2-WIRE SHIELDED.
(IF WIRELESS ORDERED, CABLE NOT REQ'D.)

LEDs: AMBER LED.


OPTIONS: LIGHTNING DAMAGE REDUCTION UNIT.

WIRELESS MP-70 CONTROL OPERATION.

ESTIMATED WEIGHT: 646 LBS.

GENERAL NOTES:

- * REFERENCE 01-0500-01 FOR INSTALLATION NOTES.
- * POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

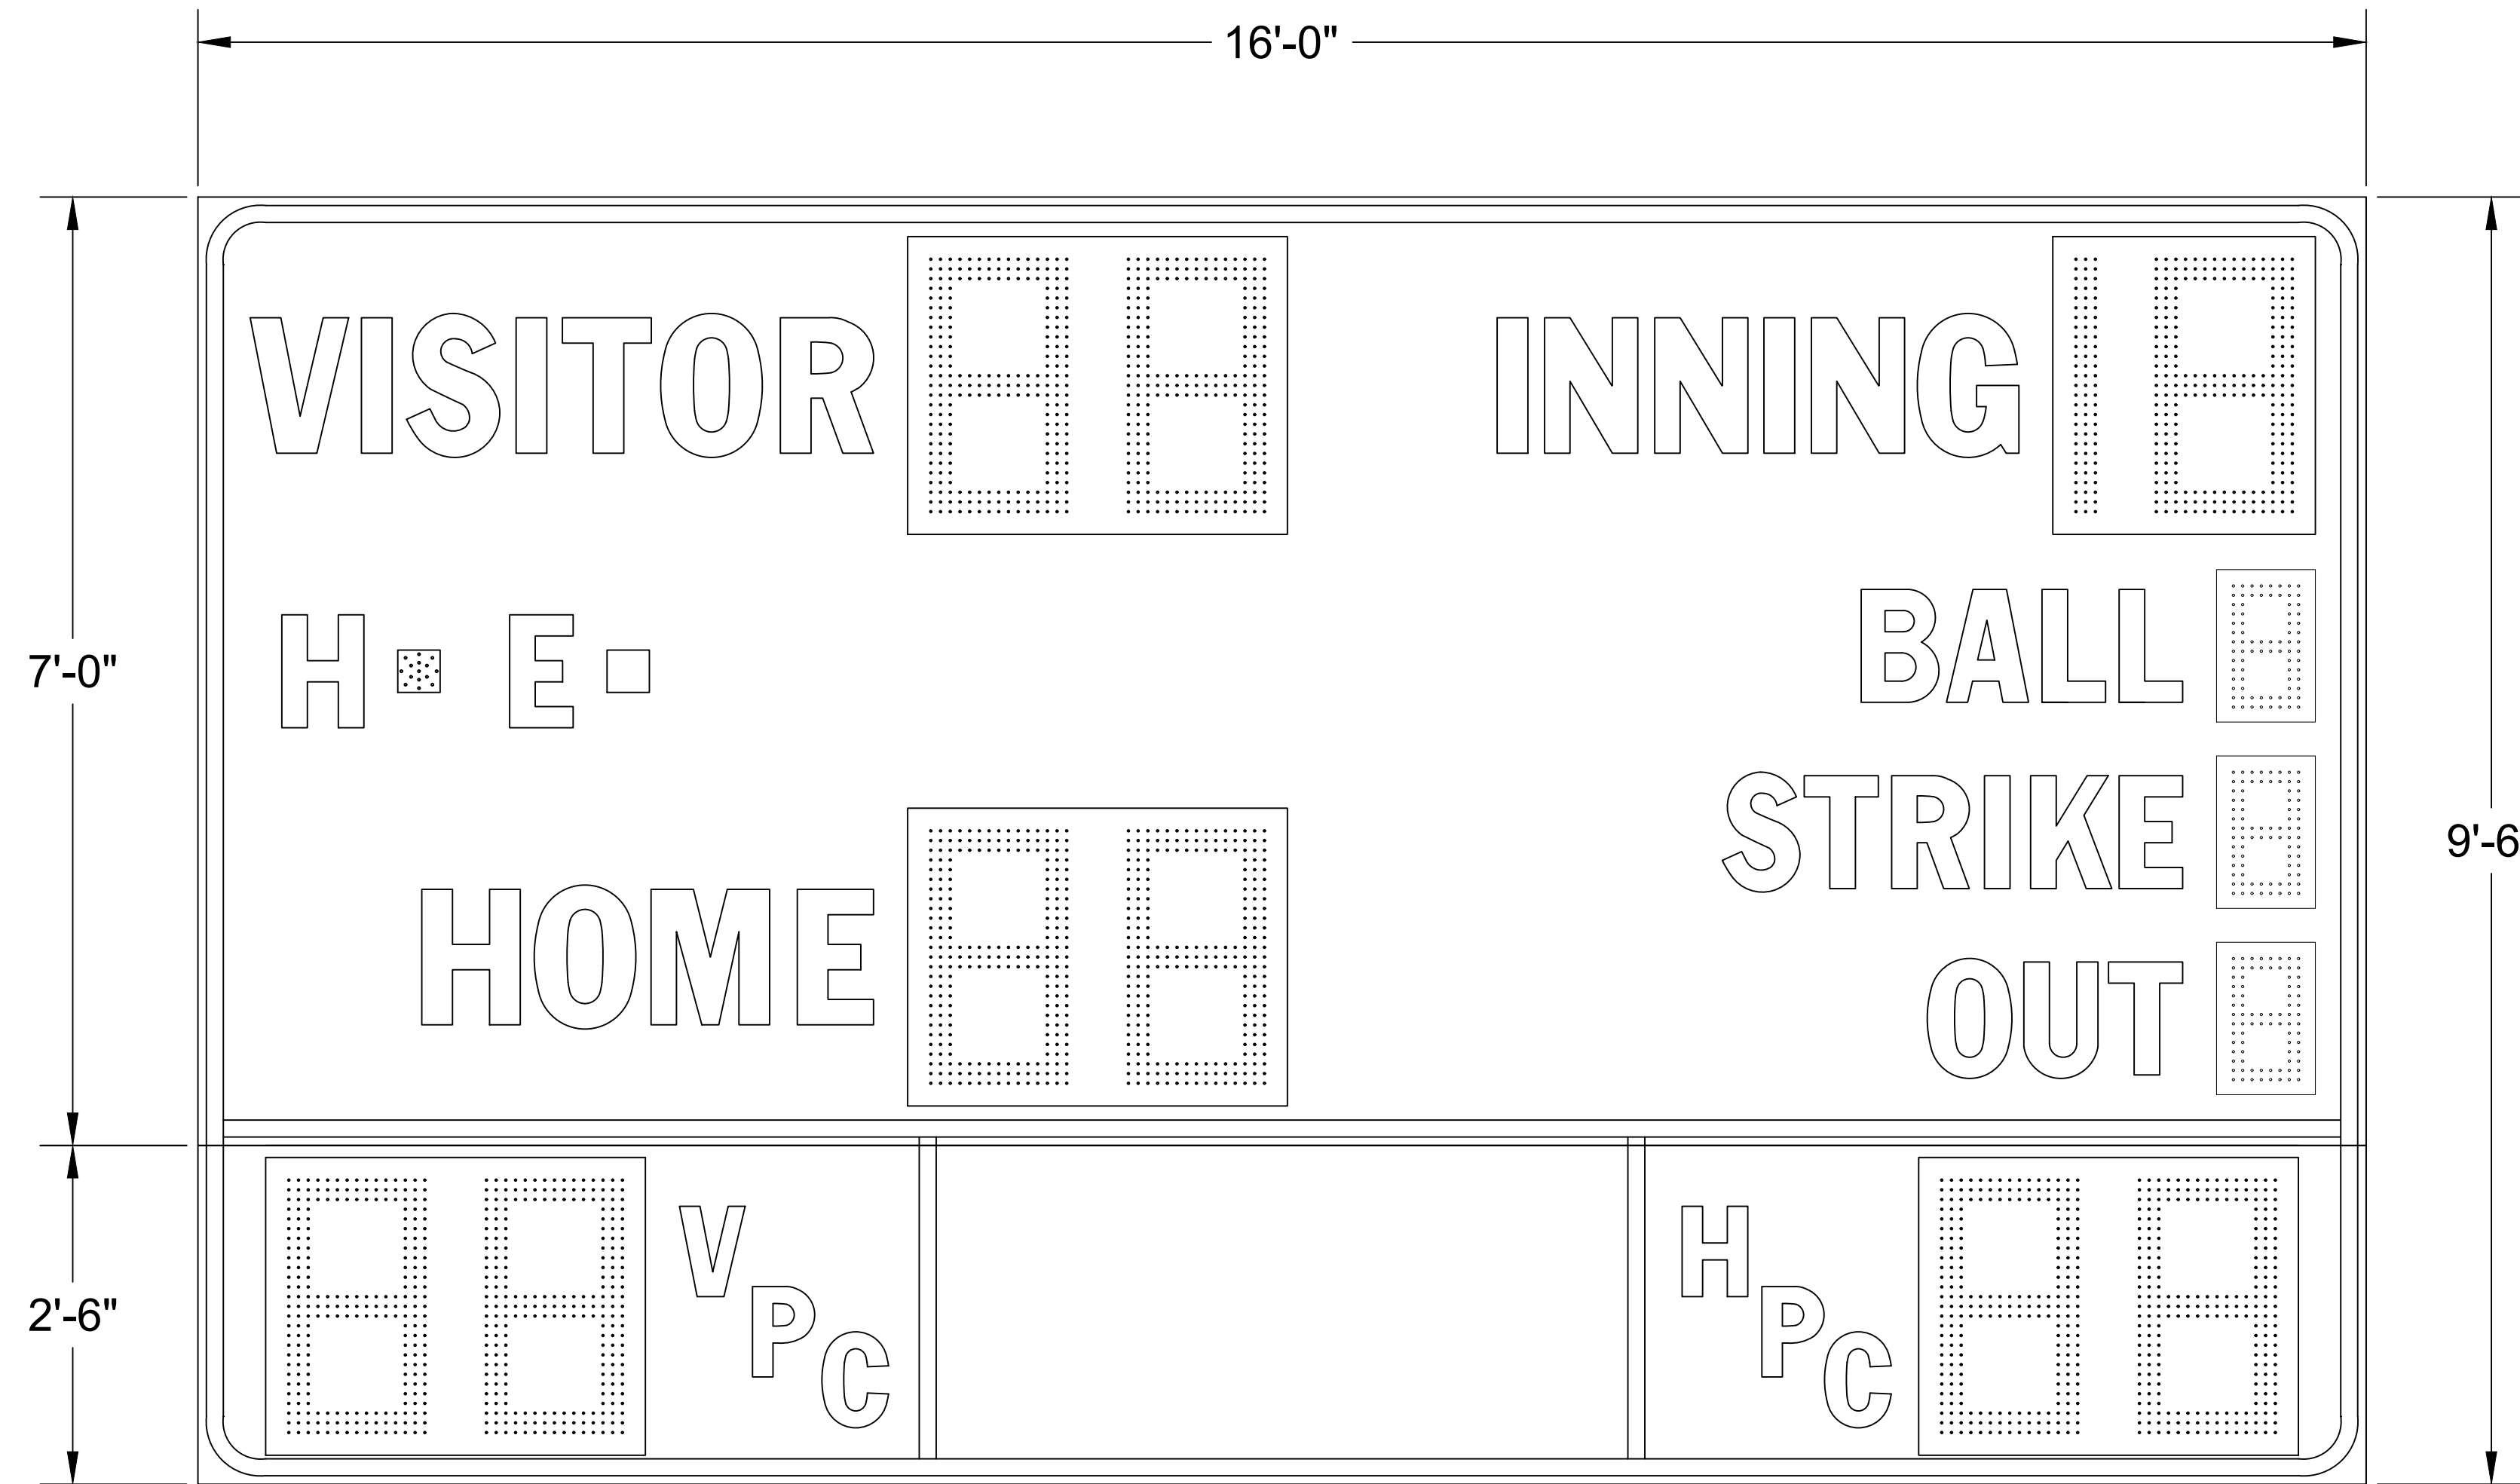

BA-7216PC-2
(24"H DIGITS MOVED TO THE ENDS OF PITCH COUNT SECTION, ADDED TRIM)

FAIR-PLAY

6110 AVIATOR DRIVE
HAZELWOOD, MO 63042
fair-play.com

OR	ORIGINAL RELEASE	02-05-18	BEW
REV.#	CHANGE	DATE	BY

PROJECT NAME:		REF. #:	
THIS DOCUMENT CONTAINS TRANS-LUX PROPRIETARY INFORMATION. ANY DISCLOSURE, USE OR DUPLICATION OF THE DOCUMENT OR OF ANY INFORMATION CONTAINED THEREIN FOR OTHER THAN THE SPECIFIC PURPOSE FOR WHICH IT WAS DISCLOSED IS EXPRESSLY PROHIBITED, EXCEPT AS MAY BE OTHERWISE AGREED TO IN WRITING. COPYRIGHT 2017.			
TITLE	DRAWN BY	MODEL:	
FACE VIEW FOR BA-7216PC-2	BEW	B	BA-7216PC-2
	DATE		
	02-05-18		
	SCALE	DWG. NO.	
	1/2"=1'-0"	01-7216-03-1	