

### CAPTIONS (H" x W")

|               |           |
|---------------|-----------|
| HOME          | 14" x 45" |
| VISITOR       | 14" x 58" |
| BALL          | 12" x 37" |
| STRIKE        | 12" x 51" |
| OUT           | 12" x 30" |
| AT BAT        | 9" x 40"  |
| 1             | 9" x 5"   |
| 2,3,4,5,6,8,9 | 9" x 7"   |
| 7             | 9" x 6"   |
| 10            | 9" x 12"  |
| R, H          | 9" x 7"   |
| E             | 9" x 6"   |

### DIGIT SIZES (H")

|               |     |
|---------------|-----|
| AT BALL       | 24" |
| BALL          | 24" |
| H/E COUNTER   | 24" |
| STRIKE        | 24" |
| OUT           | 24" |
| HITS          | 15" |
| INNING SCORES | 15" |
| RUN           | 15" |
| ERROR         | 15" |

UV resistant custom paint & vinyl trim colors available.


#### 15 Fair-Play FREE Standard Trim Tape Colors



#### 12 Fair-Play FREE Standard Scoreboard Colors



### MODEL: BA-7228-2

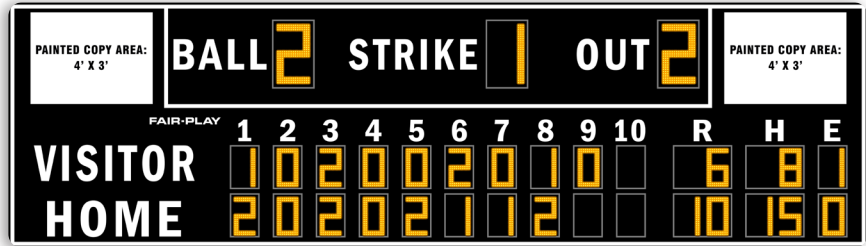

### DIMENSIONS

| Height | Length | Depth | Weight   |
|--------|--------|-------|----------|
| 8'-0"  | 28'-0" | 10"   | 600 lbs. |

### STANDARD EQUIPMENT

- Super-bright, wide-angle amber LED's
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable display mounting
- Built-in lighting suppressor (for standard data direct wire only)
- Request a free project design renderings
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

### OPTIONAL EQUIPMENT

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- Personalized vinyl home team name
- Scoreboard caption color (other than white)
- Custom, unique signage options
- Scoreboard control carrying case
- Truss and decorative steel systems
- Power lighting protector

### ELECTRICAL

| Voltage | Hertz | Watts | AMPS | Phase | Wiring          | Circuits Required | Safety Listing | Scoreboard Display              | Control Console              |
|---------|-------|-------|------|-------|-----------------|-------------------|----------------|---------------------------------|------------------------------|
| 120 VAC | 60    | 518   | 5    | 1     | 2-Wire + ground | 1                 | ETL/CETL       | -22° to 131° F<br>-30° to 55° C | 32° to 131° F<br>0° to 55° C |

### OPERATING TEMPERATURES

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

### For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions — electronic available, operated via control
- Pitch Speed or Pitch Count Display Systems