


CAPTIONS (H" x W")

| | |
|---------|---------------|
| HOME | 9" x 41" |
| VISITOR | 9" x 49" |
| INNING | 9" x 45" |
| BALL | 9" x 33" |
| STRIKE | 9" x 48" |
| OUT | 9" x 27" |
| H | 9" x 8" |
| E | 9" x 7" |
| PERIOD | 9" x 44" |
| HPC/VPC | 19.5" x 18.5" |

DIGIT SIZES (H")

| | |
|-------------|------|
| Team Scores | 18" |
| Game Clock | 18" |
| Inning | 18" |
| Period | 18" |
| Out | 18" |
| Ball | 18" |
| Strike | 18" |
| HPC/VPC | 18" |
| H/E Spot | 3.5" |
| At Bat Spot | 3.5" |

MODEL: MP-7200PC-2

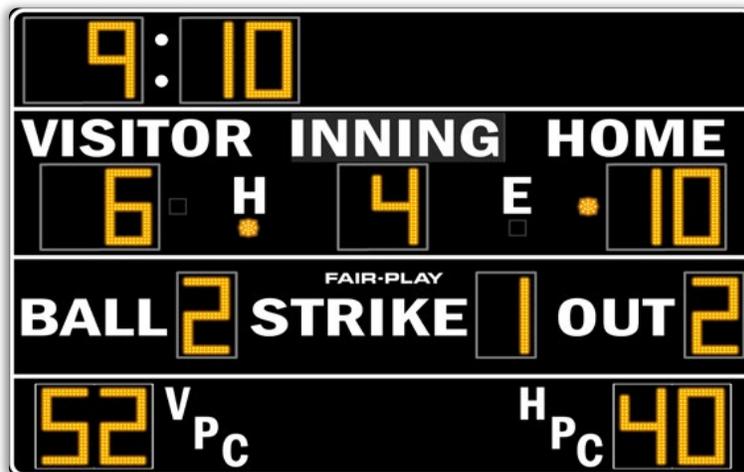

| DIMENSIONS | Height | Length | Depth | Weight |
|------------|--------|--------|-------|------------|
| | 9'-6" | 14'-0" | 10" | 1,068 lbs. |

STANDARD EQUIPMENT

- Super-bright, wide-angle amber LED's
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable display mounting
- Built-in lighting suppressor (for standard data direct wire only)
- Request a free project design renderings
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

OPTIONAL EQUIPMENT

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- Personalized vinyl home team name
- Scoreboard caption color (other than white)
- Custom, unique signage options
- Scoreboard control carrying case
- Truss and decorative steel systems
- Power lighting protector or protective net

Please see Color Chart PDF for all scoreboard color options.

UV resistant custom paint & vinyl trim colors available.

ELECTRICAL

| Voltage | Hertz | Watts | AMPS | Phase | Wiring | Circuits Required | Safety Listing | Scoreboard Display | Control Console |
|---------|-------|-------|------|-------|-----------------|-------------------|----------------|---------------------------------|------------------------------|
| 120 VAC | 60 | 227 | 2 | 1 | 2-Wire + ground | 1 | ETL/CETL | -22° to 131° F -30° to 55° C | 32° to 131° F 0° to 55° C |

OPERATING TEMPERATURES

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions — electronic available, operated via control
- Integrated, second operator statistics control