


<u>TK-8918-2</u>

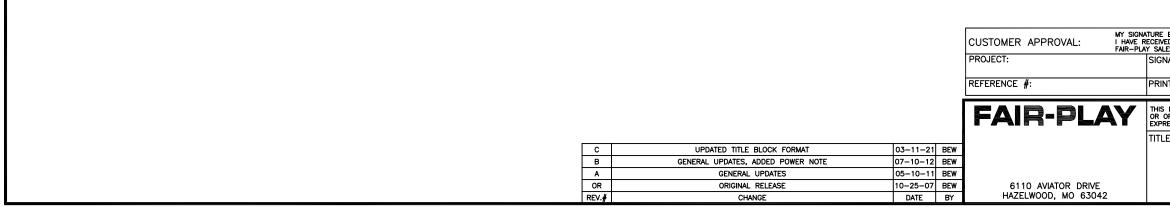

POWER: 120 VAC, 60 Hz., 1-PHASE 531 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70 SERIES CONTROLLER. CONTROL CABLE: 22GA 2-WIRE SHIELDED. (IF WIRELESS ORDERED, NO CABLE REQ'D.)

OPTIONS: LIGHTNING DAMAGE REDUCTION UNIT.

OPTIONAL WIRELESS MP-70 OPERATION.

* REFERENCE 01-0500-01 FOR INSTALLATION NOTES. * POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

MY SIGNATURE BELOW SIGNIFIES MY APPROVAL TO PROCEED WITH THE DESIGN WORK SPECIFIED HEREIN AND ACKNOWLEDGEMENT THAT I HAVE RECEIVED AND READ THE INSTALLATION SPECIFICATIONS CONTAINED IN FAR-PLAY DOCUMENT NO. 01-0500-01. CONSULT YOUR FAIR-PLAY SALES ASSOCIATE IF YOU SHOULD HAVE ANY QUESTIONS OR REQUIRE ANY CHANGES TO THIS DOCUMENT.				
	SIGNATURE:	DATE:		
	PRINT NAME:			
Y	THIS DOCUMENT CONTAINS FAIR-PLAY PROPRIETARY INFORMATION. ANY DISCLOSURE, USE OR DUPLICATION OF THE DOCUMENT OR OF ANY INFORMATION CONTAINED THEREIN FOR OTHER THAN THE SPECIFIC PURPOSE FOR WHICH IT WAS DISCLOSED IS EXPRESSLY PROHIBITED, EXCEPT AS MAY BE OTHERWISE AGREED TO IN WRITING. COPYRIGHT 2019.			
		DRAWN BY BEW DATE	В	MODEL TK-8918-2
	TK-8918-2	10-25-07 SCALE 1/2"=1'-0"	dwg. 01	^{№.} -8918-04-1