

HK-8216-2

SIZE: 16'-0"L X 5'-0"H X 10"D

POWER: 120 VAC, 60 Hz., 1-PHASE  
321 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70 SERIES CONTROLLER.  
CONTROL CABLE: 22GA 2-WIRE SHIELDED.  
(NO CABLE REQ'D. IF ORDERED WIRELESS.)

LEDs: AMBER LED.

OPTIONS: MODEL HC-70 CLOCK HAND SWITCH FOR SECOND  
OPERATOR. (CLOCK START/STOP & CLOCK RESET.)


LIGHTNING DAMAGE REDUCTION UNIT.

WIRELESS MP-70 CONTROL OPERATION.

ACTUAL WEIGHT: 320 LBS.

GENERAL NOTES:

- \* REFERENCE 01-0500-01 FOR INSTALLATION NOTES.
- \* POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

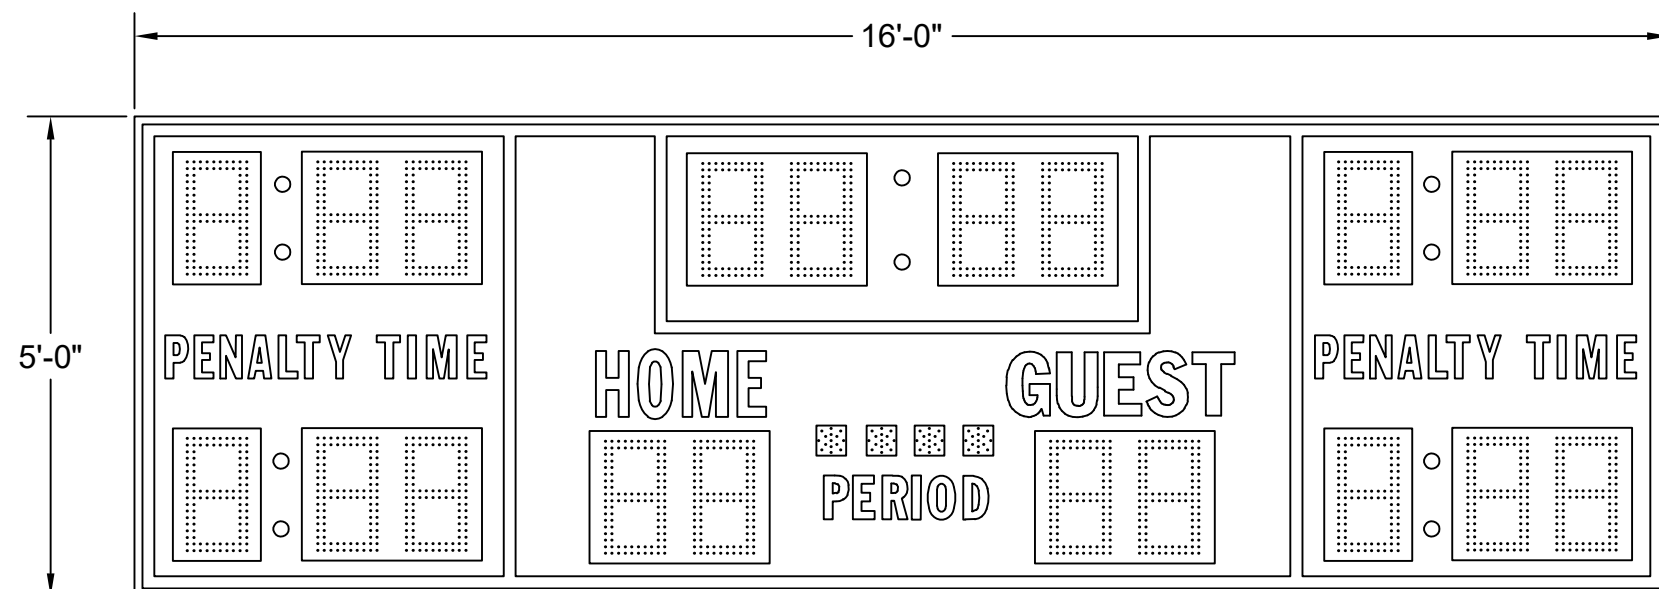

HK-8216-2

CUSTOMER APPROVAL:		MY SIGNATURE BELOW SIGNIFIES MY APPROVAL TO PROCEED WITH THE DESIGN WORK SPECIFIED HEREIN AND ACKNOWLEDGEMENT THAT I HAVE RECEIVED AND READ THE INSTALLATION SPECIFICATIONS CONTAINED IN FAIR-PLAY DOCUMENT NO. 01-0500-01. CONSULT YOUR FAIR-PLAY SALES ASSOCIATE IF YOU SHOULD HAVE ANY QUESTIONS OR REQUIRE ANY CHANGES TO THIS DOCUMENT.	
PROJECT:	SIGNATURE:	DATE:	
REFERENCE #:	PRINT NAME:		

REV.#	CHANGE	DATE	BY
D	UPDATED TITLE BLOCK FORMAT	09-27-21	BEW
C	UPDATE SPOT PATTERN	02/04/13	DMS
B	GENERAL UPDATES, DWG FORMAT	05-23-11	BEW
A	GENERAL UPDATES	12/17/09	RMS
OR	ORIGINAL RELEASE	09-26-03	BEW

<b>FAIR-PLAY</b>	THIS DOCUMENT CONTAINS FAIR-PLAY PROPRIETARY INFORMATION. ANY DISCLOSURE, USE OR DUPLICATION OF THE DOCUMENT OR OF ANY INFORMATION CONTAINED THEREIN FOR OTHER THAN THE SPECIFIC PURPOSE FOR WHICH IT WAS DISCLOSED IS EXPRESSLY PROHIBITED, EXCEPT AS MAY BE OTHERWISE AGREED TO IN WRITING. COPYRIGHT 2019.		
	TITLE	FACE VIEW FOR HK-8216-2	DRAWN BY BEW
			DATE 09-26-03
			SCALE 1/2"=1'-0"
6110 AVIATOR DRIVE HAZELWOOD, MO 63042		MODEL B HK-8216-2	DWG. NO. 01-8216-01-1