


CAPTIONS (H" x W")

HOME (Amber)	6" x 18"
VISITOR (Amber)	6" x 25"
PERIOD	4" x 17"
BONUS	4" x 15"
POSS	3" x 9"
FOULS (Personal)	4" x 14"
FOULS (Team)	4" x 14"
PLAYER	4" x 17"
NO	4" x 6"
F	4" x 3"
PTS	4" x 8"
CP-POINTS	4" x 15"
CP-MATCH	4" x 15"
CP-WON	4" x 9"
CP-GAME	4" x 12"
Stats Digs	4" x 11"
Stats Kills	4" x 12"
Colon Diameter	1.5"

MODEL: BB-3666-4

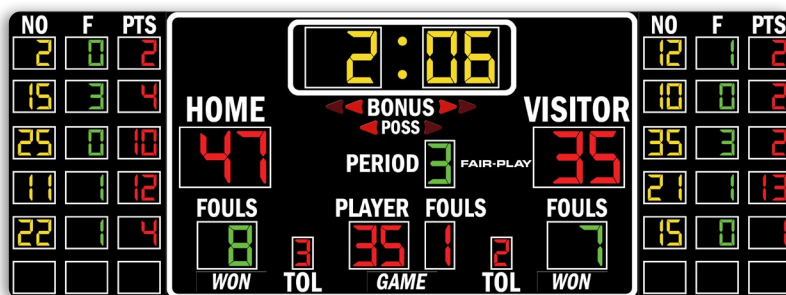

DIMENSIONS

Height	Length	Depth	Weight
5'-6"	15'-0"	4"	262 lbs.

DIGIT SIZES (H")

Game Clock (Amber)	12"
Team Scores (Red)	12"
Period (Green)	10"
Team Fouls (Green)	10"
Player Number (Red)	10"
Personal Fouls (Red)	10"
Stats Fouls (Red)	6"
Stats Player (Red)	6"
Stats Points (Red)	6"
Stats Kills (Red)	6"
Stats Digs (Red)	6"

STANDARD EQUIPMENT

- Energy efficient LED designs
- Three distinct LED digit colors to visually organize critical game information
- 6-Player Stats Panels using 6"H LED Bar Digits
- Heavy-duty, vibrating horn (103 dB)
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable scoreboard mounting
- Built-in lightning suppressor (for standard data direct wire only)
- Request a free project design rendering
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

OPTIONAL EQUIPMENT

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- Personalized vinyl home team name
- Scoreboard caption color (other than white)
- Custom, unique signage options
- Scoreboard control carrying case
- Truss and decorative steel systems
- Power lightning protector or protective net
- Court side tables options in 8ft, 10ft or 7.7ft long configured with front BB scoreboard
- Synchronized locker room game / time of day clocks

Please see Color Chart PDF for all scoreboard color options.

UV resistant custom paint & vinyl trim colors available.

ELECTRICAL

Voltage	Hertz	Watts	AMPS	Phase	Wiring	Circuits Required	Safety Listing	Scoreboard Display	Control Console
120 VAC	60	385	3	1	2-Wire + ground	1	ETL/CETL	-22° to 131° F	-30° to 55° C

OPERATING TEMPERATURES

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions — electronic available, operated via control
- Integrated, second operator statistics control