


### CAPTIONS (H" x W")

|             |           |
|-------------|-----------|
| HOME        | 10" x 38" |
| VISITOR     | 10" x 44" |
| STRIKE      | 10" x 43" |
| OUT         | 10" x 25" |
| BALL        | 10" x 31" |
| 1           | 7" x 4"   |
| 2,3,4,5,6,7 | 7" x 5"   |
| TOTAL       | 7" x 26"  |

### DIGIT SIZES (H")

|              |     |
|--------------|-----|
| BALL         | 15" |
| OUT          | 15" |
| STRIKE       | 15" |
| INNING SCORE | 12" |
| TOTAL        | 12" |

### MODEL: BA-1478

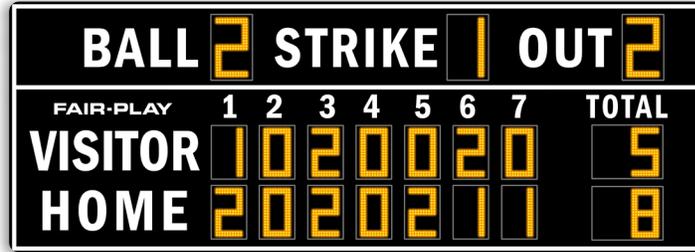

### DIMENSIONS

| Height | Length | Depth | Weight   |
|--------|--------|-------|----------|
| 6'-6"  | 14'-0" | 10"   | 387 lbs. |

### STANDARD EQUIPMENT

- Super-bright, wide-angle amber LED's
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable display mounting
- Built-in lightning suppressor (for standard data direct wire only)
- Request a free project design rendering
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

### OPTIONAL EQUIPMENT

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- Personalized vinyl home team name
- Scoreboard caption color (other than white)
- Custom, unique signage options
- Scoreboard control carrying case
- Truss and decorative steel systems
- Power lightning protector

Please see Color Chart PDF for all scoreboard color options.

UV resistant custom paint & vinyl trim colors available.

### ELECTRICAL

| Voltage | Hertz | Watts | AMPS | Phase | Wiring          | Circuits Required | Safety Listing | Scoreboard Display | Control Console |               |             |
|---------|-------|-------|------|-------|-----------------|-------------------|----------------|--------------------|-----------------|---------------|-------------|
| 120 VAC | 60    | 277   | 3    | 1     | 2-Wire + ground | 1                 | ETL/CETL       | -22° to 131° F     | -30° to 55° C   | 32° to 131° F | 0° to 55° C |

### OPERATING TEMPERATURES

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

### For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions — electronic available, operated via control
- Pitch Speed or Pitch Count Display Systems

For orders and questions:  
sales@fair-play.com

**FAIRPLAY CORPORATION** 800.247.0265 • fair-play.com  
Nearly a Century of Scoring Experience 6110 Aviator Drive, Hazelwood, MO 63042