


CAPTIONS (H" x W")

HOME	9" x 41"
VISITOR	9" x 49"
INNING	9" x 45"
BALL	9" x 33"
STRIKE	9" x 48"
OUT	9" x 27"
H	9" x 8"
E	9" x 7"
PERIOD	9" x 44"

DIGIT SIZES (H")

Team Scores	18"
Game Clock	18"
Inning	18"
Period	18"
Out	18"
Ball Spot	18"
Strike	18"
H/E Spot	3.5"
At Bat Spot	3.5"

MODEL: MP-7200

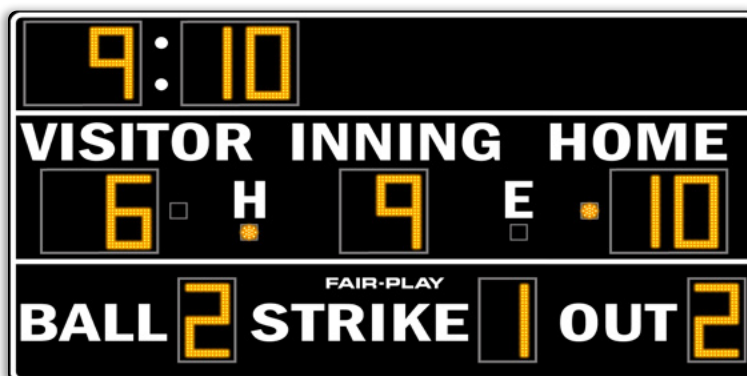

DIMENSIONS	Height	Length	Depth	Weight
	7'-6"	14'-0"	10"	919 lbs.

STANDARD EQUIPMENT

- Super-bright, wide-angle amber LED's
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable display mounting
- Built-in lightning suppressor (for standard data direct wire only)
- Request a free project design rendering
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

OPTIONAL EQUIPMENT

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- Personalized vinyl home team name
- Scoreboard caption color (other than white)
- Custom, unique signage options
- Scoreboard control carrying case
- Truss and decorative steel systems
- Power lightning protector or protective net

Please see Color Chart PDF for all scoreboard color options.

UV resistant custom paint & vinyl trim colors available.

ELECTRICAL

Voltage	Hertz	Watts	AMPS	Phase	Wiring	Circuits Required	Safety Listing	Scoreboard Display	Control Console
120 VAC	60	169	2	1	2-Wire + ground	1	UL	-22° to 131° F	-30° to 55° C

OPERATING TEMPERATURES

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions — electronic available, operated via control
- Integrated, second operator statistics control