

BB-1670-4

SIZE: 9'-0" L X 5'-0" H X 4" D

POWER: 120 VAC, 60 Hz., 1-PHASE
127 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70 SERIES CONTROLLER, TA-70.
CONTROL CABLE: 22GA 2-WIRE SHIELDED.

LEDs: LED BAR.


OPTIONS: MODEL HH-70 CLOCK HAND SWITCH FOR SECOND OPERATOR.
(CLOCK START/STOP & MANUAL HORN.)

MODEL HC-70 CLOCK HAND SWITCH FOR SECOND OPERATOR.
(CLOCK START/ STOP & CLOCK RESET.)

ESTIMATED WEIGHT: 101 LBS.

GENERAL NOTES:

- * REFERENCE 01-0500-01 FOR INSTALLATION NOTES.
- * POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

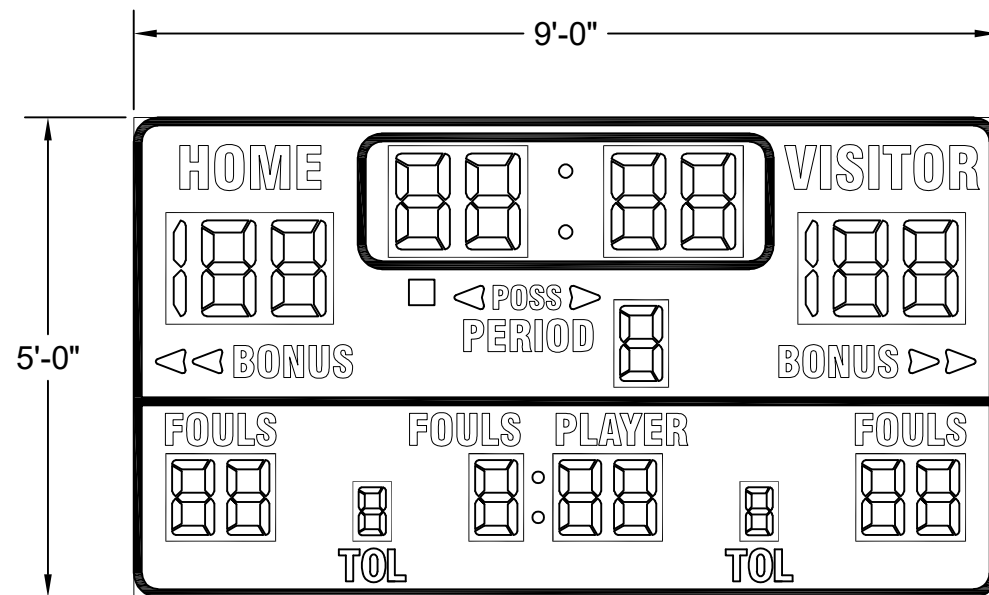

BB-1670-4

| | | | |
|--------------------|-------------|--|--|
| CUSTOMER APPROVAL: | | MY SIGNATURE BELOW SIGNIFIES MY APPROVAL TO PROCEED WITH THE DESIGN WORK SPECIFIED HEREIN AND ACKNOWLEDGEMENT THAT I HAVE RECEIVED AND READ THE INSTALLATION SPECIFICATIONS CONTAINED IN FAIR-PLAY DOCUMENT NO. 01-0500-01. CONSULT YOUR FAIR-PLAY SALES ASSOCIATE IF YOU SHOULD HAVE ANY QUESTIONS OR REQUIRE ANY CHANGES TO THIS DOCUMENT. | |
| PROJECT: | SIGNATURE: | DATE: | |
| REFERENCE #: | PRINT NAME: | | |

| | | | | |
|---|---|--------------|----------|-----------|
| FAIR-PLAY | THIS DOCUMENT CONTAINS FAIR-PLAY PROPRIETARY INFORMATION. ANY DISCLOSURE, USE OR DUPLICATION OF THE DOCUMENT OR OF ANY INFORMATION CONTAINED THEREIN FOR OTHER THAN THE SPECIFIC PURPOSE FOR WHICH IT WAS DISCLOSED IS EXPRESSLY PROHIBITED, EXCEPT AS MAY BE OTHERWISE AGREED TO IN WRITING. COPYRIGHT 2019. | | | |
| | TITLE | DRAWN BY | MODEL | |
| | FACE VIEW FOR BB-1670-4 | BEW | B | BB-1670-4 |
| | | DATE | DWG. NO. | |
| | 09-19-07 | 01-1670-02-1 | | |
| | SCALE | | | |
| | 1/2"=1'-0" | | | |
| 6110 AVIATOR DRIVE HAZELWOOD, MO 63042 | | | | |

| REV.# | CHANGE | DATE | BY |
|-------|-----------------------------------|----------|-----|
| C | UPDATED TITLE BLOCK FORMAT | 09-23-21 | BEW |
| B | GENERAL UPDATES, ADDED POWER NOTE | 05-10-12 | BEW |
| A | GENERAL UPDATES | 04-21-11 | BEW |
| OR | ORIGINAL RELEASE | 09-19-07 | BEW |