


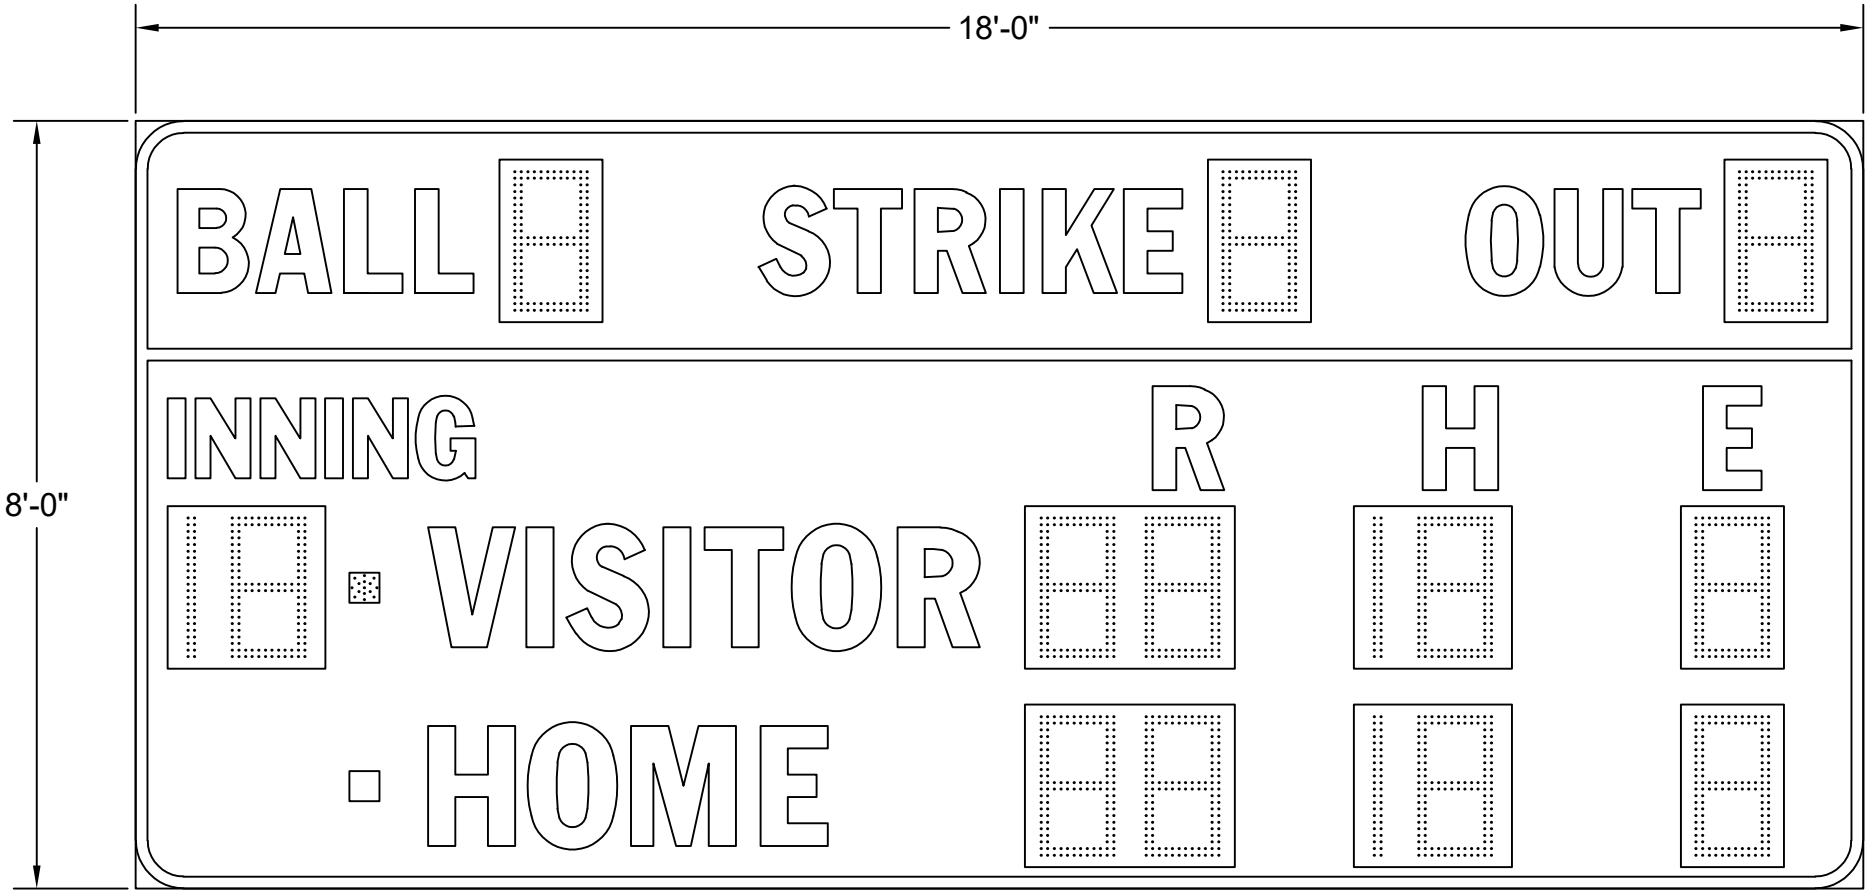

BA-7118-2

BA-7118-2

SIZE: 18'-0"L X 8'-0"H X 10"D

POWER: 120 VAC, 60 Hz., 1-PHASE
219 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70 SERIES CONTROLLER.
CONTROL CABLE: 22GA 2-WIRE SHIELDED.
(IF WIRELESS ORDERED, CABLE NOT REQ'D.)

LEDs: AMBER LED.

OPTIONS: LIGHTNING DAMAGE REDUCTION UNIT.

WIRELESS MP-70 CONTROL OPERATION.

ESTIMATED WEIGHT: 540 LBS.

GENERAL NOTES:
* REFERENCE 01-0500-01 FOR INSTALLATION NOTES.
* POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL
RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

CUSTOMER APPROVAL:		MY SIGNATURE BELOW SIGNIFIES MY APPROVAL TO PROCEED WITH THE DESIGN WORK SPECIFIED HEREIN AND ACKNOWLEDGEMENT THAT I HAVE RECEIVED AND READ THE INSTALLATION SPECIFICATIONS CONTAINED IN FAIR-PLAY DOCUMENT NO. 01-0500-01. CONSULT YOUR FAIR-PLAY SALES ASSOCIATE IF YOU SHOULD HAVE ANY QUESTIONS OR REQUIRE ANY CHANGES TO THIS DOCUMENT.	
PROJECT:	SIGNATURE:	DATE:	
REFERENCE #:	PRINT NAME:		

E	UPDATED TITLE BLOCK FORMAT	07-25-22	BEW
D	GENERAL UPDATES, POWER NOTE	02-02-12	BEW
C	GENERAL UPDATES	03-24-11	BEW
B	UPDATED POWER	03-24-10	RMS
A	GENERAL UPDATES	09-11-07	BEW
OR	ORIGINAL RELEASE	03-20-06	BEW
REV.#	CHANGE	DATE	BY

6110 AVIATOR DRIVE
HAZELWOOD, MO 63042

FAIR-PLAY

TITLE

FACE VIEW FOR
BA-7118-2

DRAWN BY
BEW

DATE
03-20-06

SCALE
1/2"=1'-0"

MODEL
BA-7118-2

DWG. NO.
01-7118-14-1