<u>VB-1718-4</u>

SIZE: 18'-0"L X 2'-0"H X 4"D

POWER: 120 VAC, 60 Hz., 1-PHASE 63 WATTS.

120 VAC AT THE CONTROL LOCATION.

CONTROL CONSOLE: MP-70-82.


CONTROL CABLE: 22GA 2-WIRE SHIELDED.

LEDs: RED LED BAR.

ACTUAL WEIGHT: 192 LBS.

GENERAL NOTES:

- * REFERENCE 01-0500-01 FOR INSTALLATION NOTES.
- * POWER REQUIREMENTS ARE VALID FOR 90 DAYS AFTER THE ORIGINAL RELEASE OR BY THE MOST RECENT REVISION OF THE DRAWING.

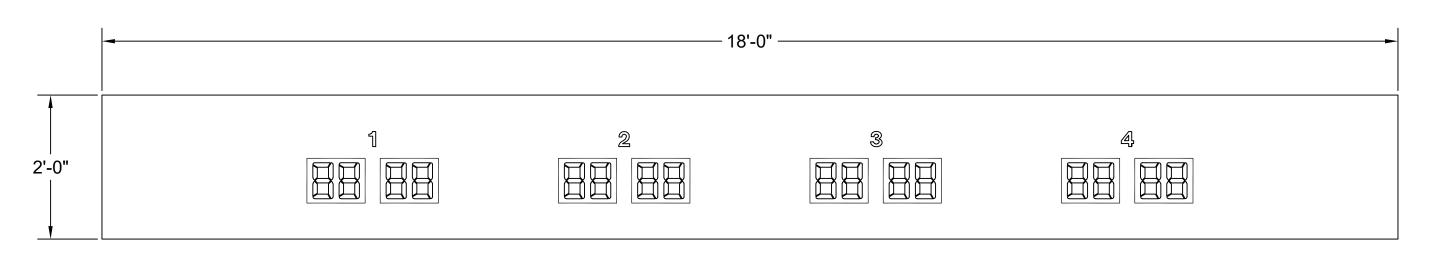

VB-1718-4
VOLLEYBALL PREVIOUS GAME SCORES

CUSTOMER APPROVAL: HAVE	ATURE BELOW SIGNIFIES MY APPROVAL TO PROCEED WITH THE DESIGN RECEIVED AND READ THE INSTALLATION SPECIFICATIONS CONTAINED IN 17 Y SALES ASSOCIATE IF YOU SHOULD HAVE ANY QUESTIONS OR REQUIR	AIR-PLAY DOCUMENT NO. 01-0500-01. CONSULT YOUR
PROJECT:	SIGNATURE:	DATE:
REFERENCE #:	PRINT NAME:	

FAIR-PLAY

THIS DOCUMENT CONTAINS FAIR-PLAY PROPRIETARY INFORMATION. ANY DISCLOSURE, USE OR DUPLICATION OF THE DOCUMENT OR OF ANY INFORMATION CONTAINED THEREIN FOR OTHER THAN THE SPECIFIC PURPOSE FOR WHICH IT WAS DISCLOSED IS EXPRESSLY PROHIBITED, EXCEPT AS MAY BE OTHERWISE AGREED TO IN WRITING. COPYRIGHT 2022.

TITLE
6110 AVIATOR DRIVE
HAZELWOOD, MO 63042

FACE VIEW FOR VB-1718-4 DRAWN BY RMS
DATE
11-14-08
SCALE
3/4"=1'-0"
DRAWN BY RMS
VB-1718-4
VB-1718-4

O1-1718-01-1

D	UPDATED TITLE BLOCK FORMAT	01-06-23	BEW
ပ	GENERAL UPDATES, ADDED POWER NOTE	07-23-12	BEW
В	UPDATES, FIXED MODEL NUMBER	08-15-11	BEW
A	GENERAL UPDATES	05-10-11	BEW
OR	ORIGINAL RELEASE	11-14-08	RMS
FV#	CHANGE	DATE	RY